FH Series





- Intermittent motion sealing with total closure wraps
- Automatic product collation
- Forming plows

Contain no moving parts for simplicity and reliability

- Inline or side infeed production
- Collation assemblies

Divide, reorient, rotate, upend, multirow or stack product



Up to 30 wraps per minute single lane, 50 per minute dual lane

• Compatible with LDPE, PVC and PO films









innovation in packaging equipment

FH Series


Model Shown: FH 24-32H

21'-1"
6,425

TRANSFER PUSHER
FORMING HEAD

1,000 3'-3"
1,250 4'-1"

SEAL BAR
SUPPLY
ELECTRICAL ENCLOSURE

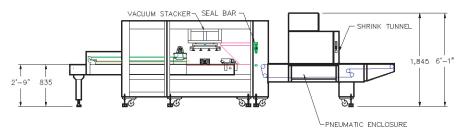

Equipment Benefits

- Heavy gauge, stainless steel construction provides strength, rigidity, cleanliness and minimal maintenance
- Forming plows produce no film waste
- Runs clear, random or print registered film
- Quick tool-free forming plow change out eliminates time consuming, costly operator adjustments and maladjustments
- Self leveling, Teflon® coated, hot knife seal bar
- Polycarbonate enclosures ensure safety and easy accessibility
- Engineered as a complete unit with a double insulated tunnel that reduces energy consumption
- Quick changeovers
- PLC touchscreen interface NCLOSURE
- Stainless steel, solid rod tunnel conveyors, free of belts or coatings



Corporate Headquarters

3301 Gateway Centre Blvd. | Pinellas Park, FL 33782 VACUI Tel: 727.578.5000 | Fax: 727.578.1300 Web: www.polypack.com | Email: info@polypack.com



